




ACUDOR

www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240

FW-5050

FIRE RATED DOOR

| QTY. | NOMINAL SIZE | A | B | C | D | E | F | LOCK |
|------|---------------------|-------------|-------------|----------|----------|-------------|-------------|------|
| | 8 X 8 (203 X 203) | 7.78 (198) | 7.78 (198) | 10 (254) | 10 (254) | 8.12 (206) | 8.12 (206) | 1 |
| | 10 x 10 (254 x 254) | 9.78 (248) | 9.78 (248) | 12 (305) | 12 (305) | 10.12 (257) | 10.12 (257) | 1 |
| | 12 x 12 (305 x 305) | 11.78 (299) | 11.78 (299) | 14 (356) | 14 (356) | 12.12 (308) | 12.12 (308) | 1 |
| | 14 x 14 (356 x 356) | 13.78 (350) | 13.78 (350) | 16 (406) | 16 (406) | 14.12 (359) | 14.12 (359) | 1 |
| | 16 x 16 (406 x 406) | 15.78 (401) | 15.78 (401) | 18 (457) | 18 (457) | 16.12 (409) | 16.12 (409) | 1 |
| | 18 x 18 (457 x 457) | 17.78 (452) | 17.78 (452) | 20 (508) | 20 (508) | 18.12 (460) | 18.12 (460) | 1 |
| | 24 x 24 (610 x 610) | 23.78 (604) | 23.78 (604) | 26 (660) | 26 (660) | 24.12 (613) | 24.12 (613) | 1 |

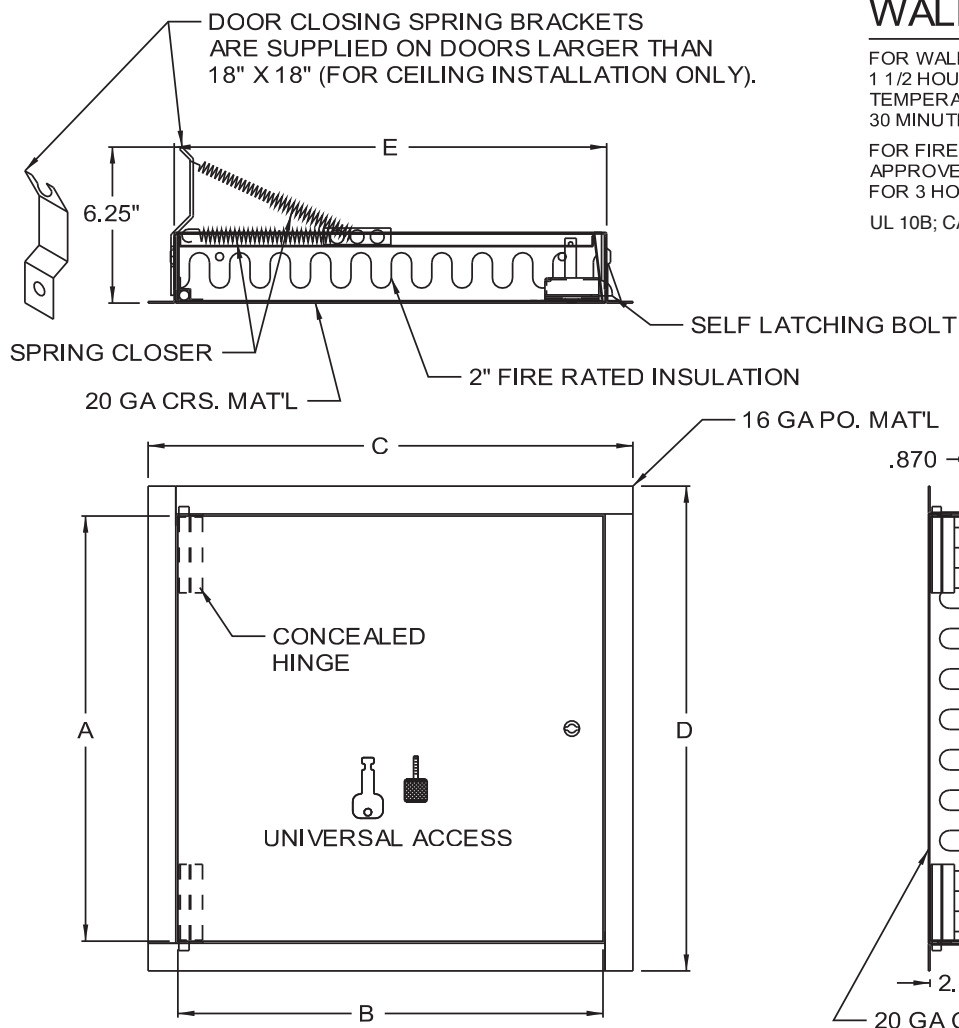


WALLS AND CEILINGS

FOR WALLS THIS DOOR HAS A "UL" AND "ULC", 1 1/2 HOUR "B" LABEL, WITH A MAXIMUM TEMPERATURE OF 250 DEGREES AFTER 30 MINUTES.

FOR FIRE RATED CEILINGS, THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL FOR 3 HOURS (MAX. SIZE 24" x 36").

UL 10B; CAN/ULC S104; NFPA 80

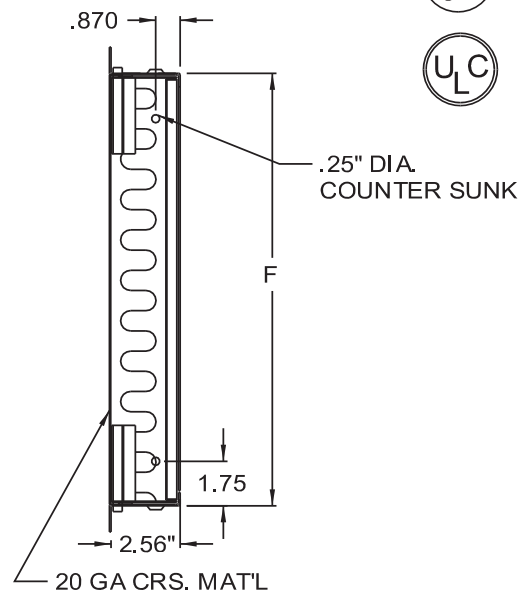

STANDARD FEATURES: UNIVERSAL SELF LATCHING BOLT- OPERATED BY KNURLED KNOB/ FLUSH KEY, WITH INSIDE TURN RELEASE. CARBON STEEL BAKED WHITE PRIME COAT (ADDITIONAL FINISH PAINT IS RECOMMENDED FOR SUPERIOR CORROSION RESISTANCE).

OPTIONS:

LOCK TYPE

- ☐ RIM CYLINDER LOCK
☐ PREPARED FOR MORTISE CYLINDER LOCK

MATERIAL

- ☐ STAINLESS STEEL
☐ OTHER

FINISH

ALL FIRE RATED:

SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSTANT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME:

APPROVED BY:

CUSTOMER:

DATE:




www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240

FW-5050

FIRE RATED DOOR

| QTY. | NOMINAL SIZE | A | B | C | D | E | F | LOCK |
|------|----------------------|--------------|-------------|----------|-----------|-------------|--------------|------|
| | 22 x 30 (559 x 762) | 29.78 (756) | 21.78 (553) | 24 (610) | 32 (813) | 22.12 (562) | 30.12 (765) | 2 |
| | 22 x 36 (559 x 914) | 35.78 (909) | 21.78 (553) | 24 (610) | 38 965) | 22.12 (562) | 36.12 (917) | 2 |
| | 24 x 36 (610 x 914) | 35.78 (909) | 23.78 (604) | 26 (660) | 38 965) | 24.12 (613) | 36.12 (917) | 2 |
| | 24 x 48 (610 x 1219) | 47.78 (1214) | 23.78 (604) | 26 (660) | 50 (1270) | 24.12 (613) | 48.12 (1222) | 2 |
| | 30 x 30 (762 x 762) | 29.78 (756) | 29.78 (756) | 32 (813) | 32 (813) | 30.12 (765) | 30.12 (765) | 2 |
| | 36 x 36 (914 x 914) | 35.78 (909) | 35.78 (909) | 38 965) | 38 965) | 36.12 (917) | 36.12 (917) | 2 |
| | 36 x 48 (914 x 1220) | 47.78 (1214) | 35.78 (909) | 38 965) | 50 (1270) | 36.12 (917) | 48.12 (1222) | 2 |
| | | | | | | | | |

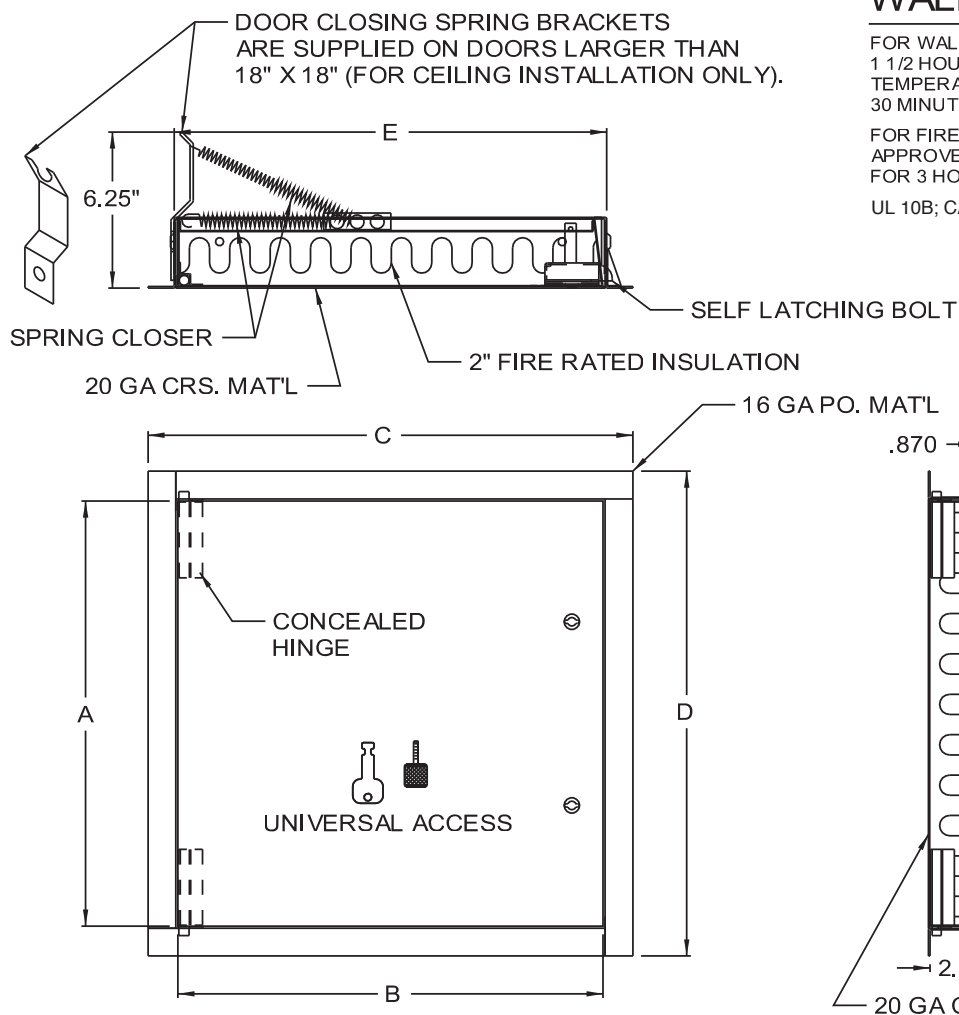

WALLS AND CEILINGS

FOR WALLS THIS DOOR HAS A "UL" AND "ULC", 1 1/2 HOUR "B" LABEL, WITH A MAXIMUM TEMPERATURE OF 250 DEGREES AFTER 30 MINUTES.

FOR FIRE RATED CEILINGS, THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL FOR 3 HOURS (MAX. SIZE 24" x 36").

UL 10B; CAN/ULC S104; NFPA 80



STANDARD FEATURES: UNIVERSAL SELF LATCHING BOLT- OPERATED BY KNURLED KNOB/ FLUSH KEY, WITH INSIDE TURN RELEASE. CARBON STEEL BAKED WHITE PRIME COAT (ADDITIONAL FINISH PAINT IS RECOMMENDED FOR SUPERIOR CORROSION RESISTANCE).

OPTIONS:

- LOCK TYPE**
- ☐ RIM CYLINDER LOCK
 - ☐ PREPARED FOR MORTISE CYLINDER LOCK

- MATERIAL**
- ☐ STAINLESS STEEL
 - ☐ OTHER

FINISH

ALL FIRE RATED:

SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSTANT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME:

APPROVED BY:

CUSTOMER:

DATE: